




-MOUNTAIN-

Ten colours

Stylish By

Nature

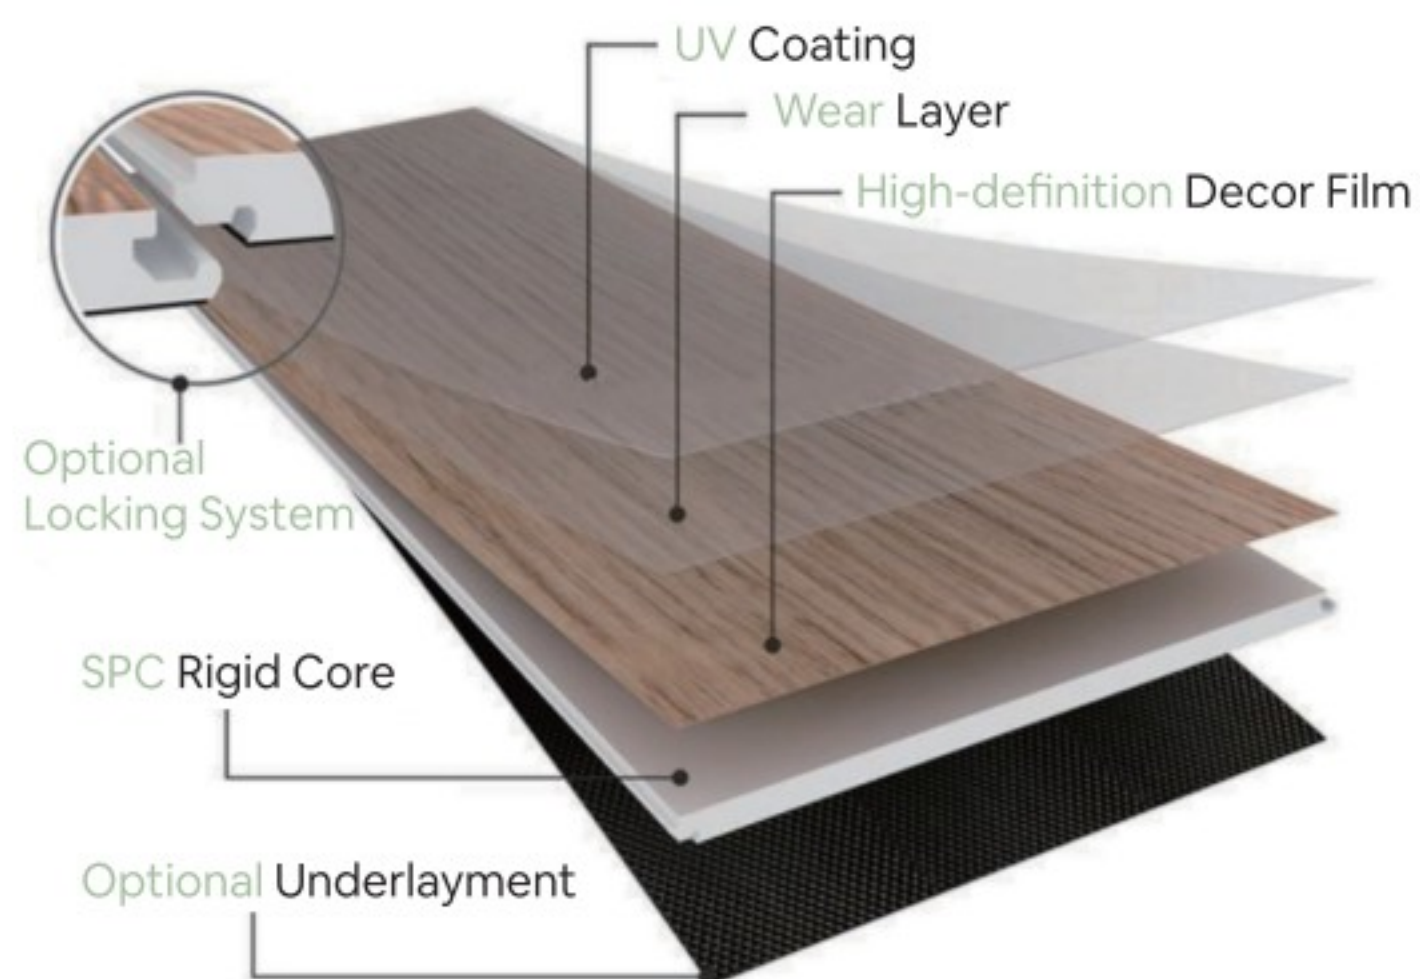

subject	parameter value	Reference standard
squareness	≤0.15 mm	ISO24342
straightness	≤0.15 mm	ISO24342
overall Thickness	± 0.20 mm	ISO24346
wear Layer Thickness	± 0.03 mm	ISO24340
surface Treatment	uv coating	
Dimensional Stability (6hrs at 80 °C)	<0.10 %	ISO23999
Curling (6hrs at 80°C)	≤1.2 mm	ISO23999
Density	2.0±0.1g/cm³	ISO23997
Residual Indentation	≤0.18mm	ASTM 1914
Peel Strength	≥60N/50mm	ISO10582
Locking strength of click joint	≥2.5KN/m	EN 16511
vertical buckle strength	≥18Mpa	In House
Effect of caster chair	15000 With Underlayment	ISO 4918
Without Underlayment	25000 Without Underlayment	
Gaps between tiles	≤0.10 mm	EN 16511
Height difference between tiles	≤0.10 mm	EN 16511
Abrasion Resistance	>1200cycles	EN 13329/E
Abrasion Resistance	Group T	EN 660- 2
scratch Resistance	≥9N	scle romer
Micro-scratch resistance	≤MSR A2/B1	EN 16094
Thermal expansion	<0.15%(10-45 c)	In House
Reaction to Fire	Bf-s1	EN 13501 - 1

subject	parameter value	Reference standard
Flatness of tiles cup ingfw	≤0.15%	EN 16511
Flatness of tiles cup ingfw, concave	≤0.10%	EN 16511
Flatness of tiles cup ing fi	≤0.5%	EN 16511
Flatness of tiles cup in gfi, concave	≤0.25%	EN 16511
Resistance to staining	Rating 5 no change	BS EN 438 (Group 1
Air comfort	PASS	
Floor score	PASS	
French voc label	A+	
Acoustic	ΔLw≥19db	ISO 10140
color Fastness	≥6Δ≤8	ISO 105
TVOC	≤0.5mg/m³	CD PH/EH LB standard
slip Resistance	Wet 35 R10 DS	BS 7976 Din 51130 EN 13893
Toxicity	Not Toxic	EN 71
Formaldehyde	E0	EN 717
only virgin Material used?	YES	
Electric Resistance	The Body Voltage	EN 1815
Vertical Resistance	≤10⁹ Ω	EN 1081
Staining and resistance to chemicals	Class O	ISO26987



1



WS6207



WS6210



WS6224




WS6225

FOUR KINDS OF STONE PATTERN


CLASSIC COLOR



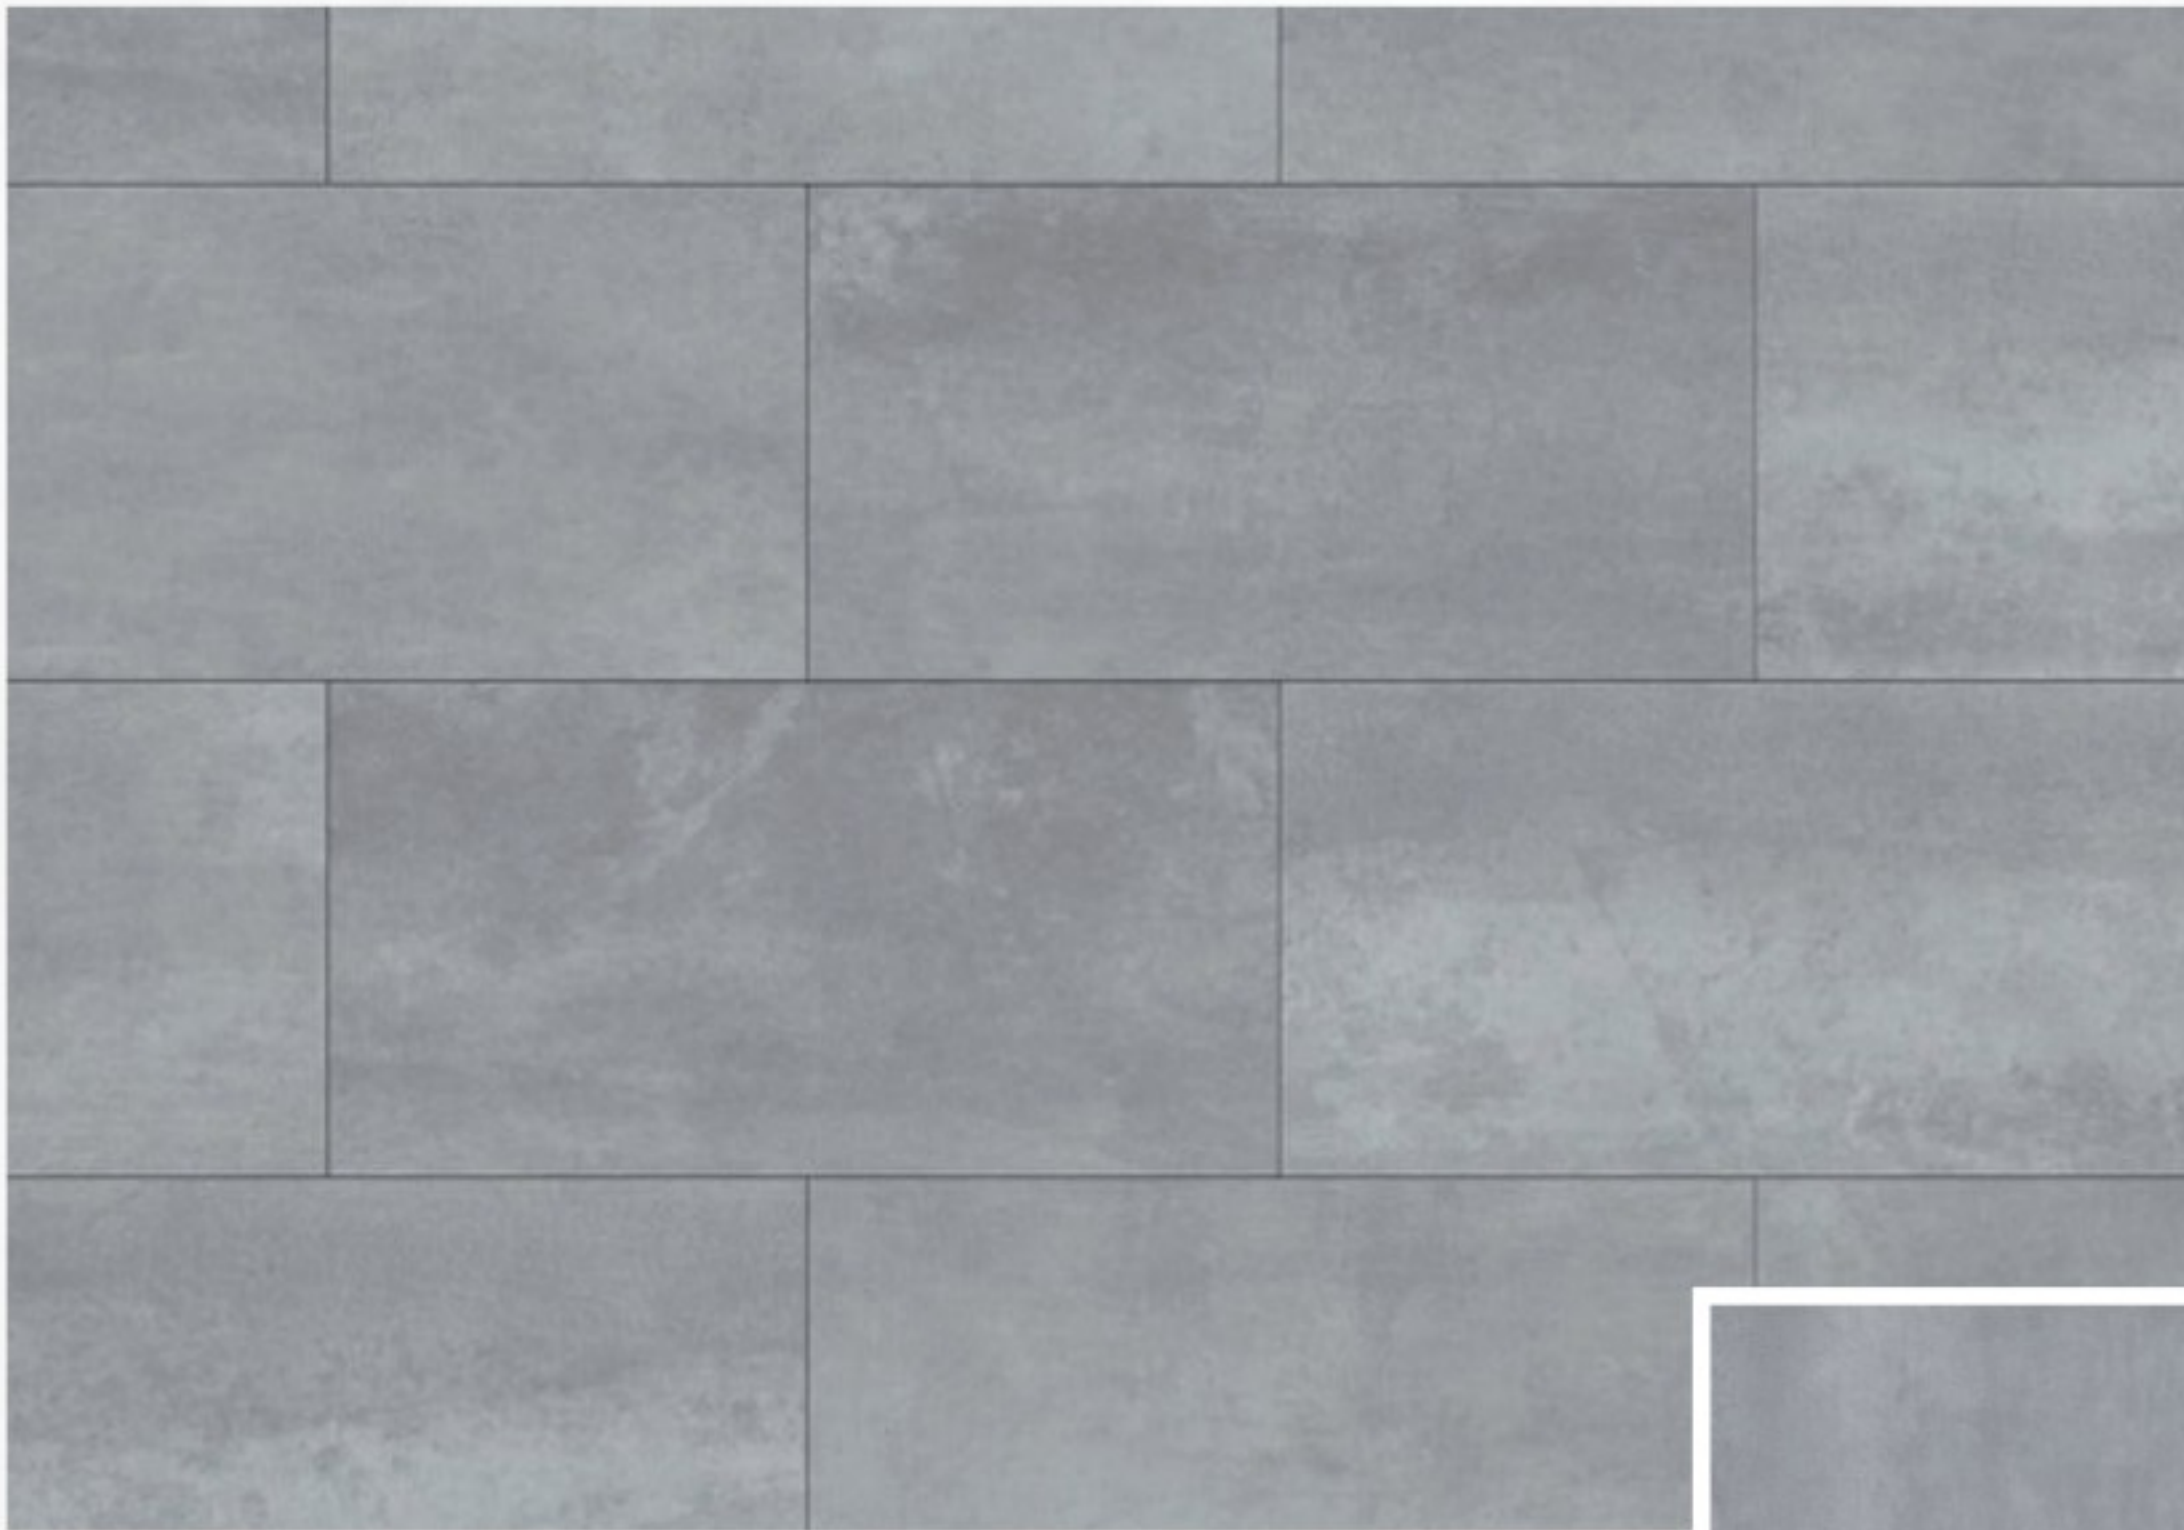



WS6210
Flooring Size: 470 x 940 x 8.0mm



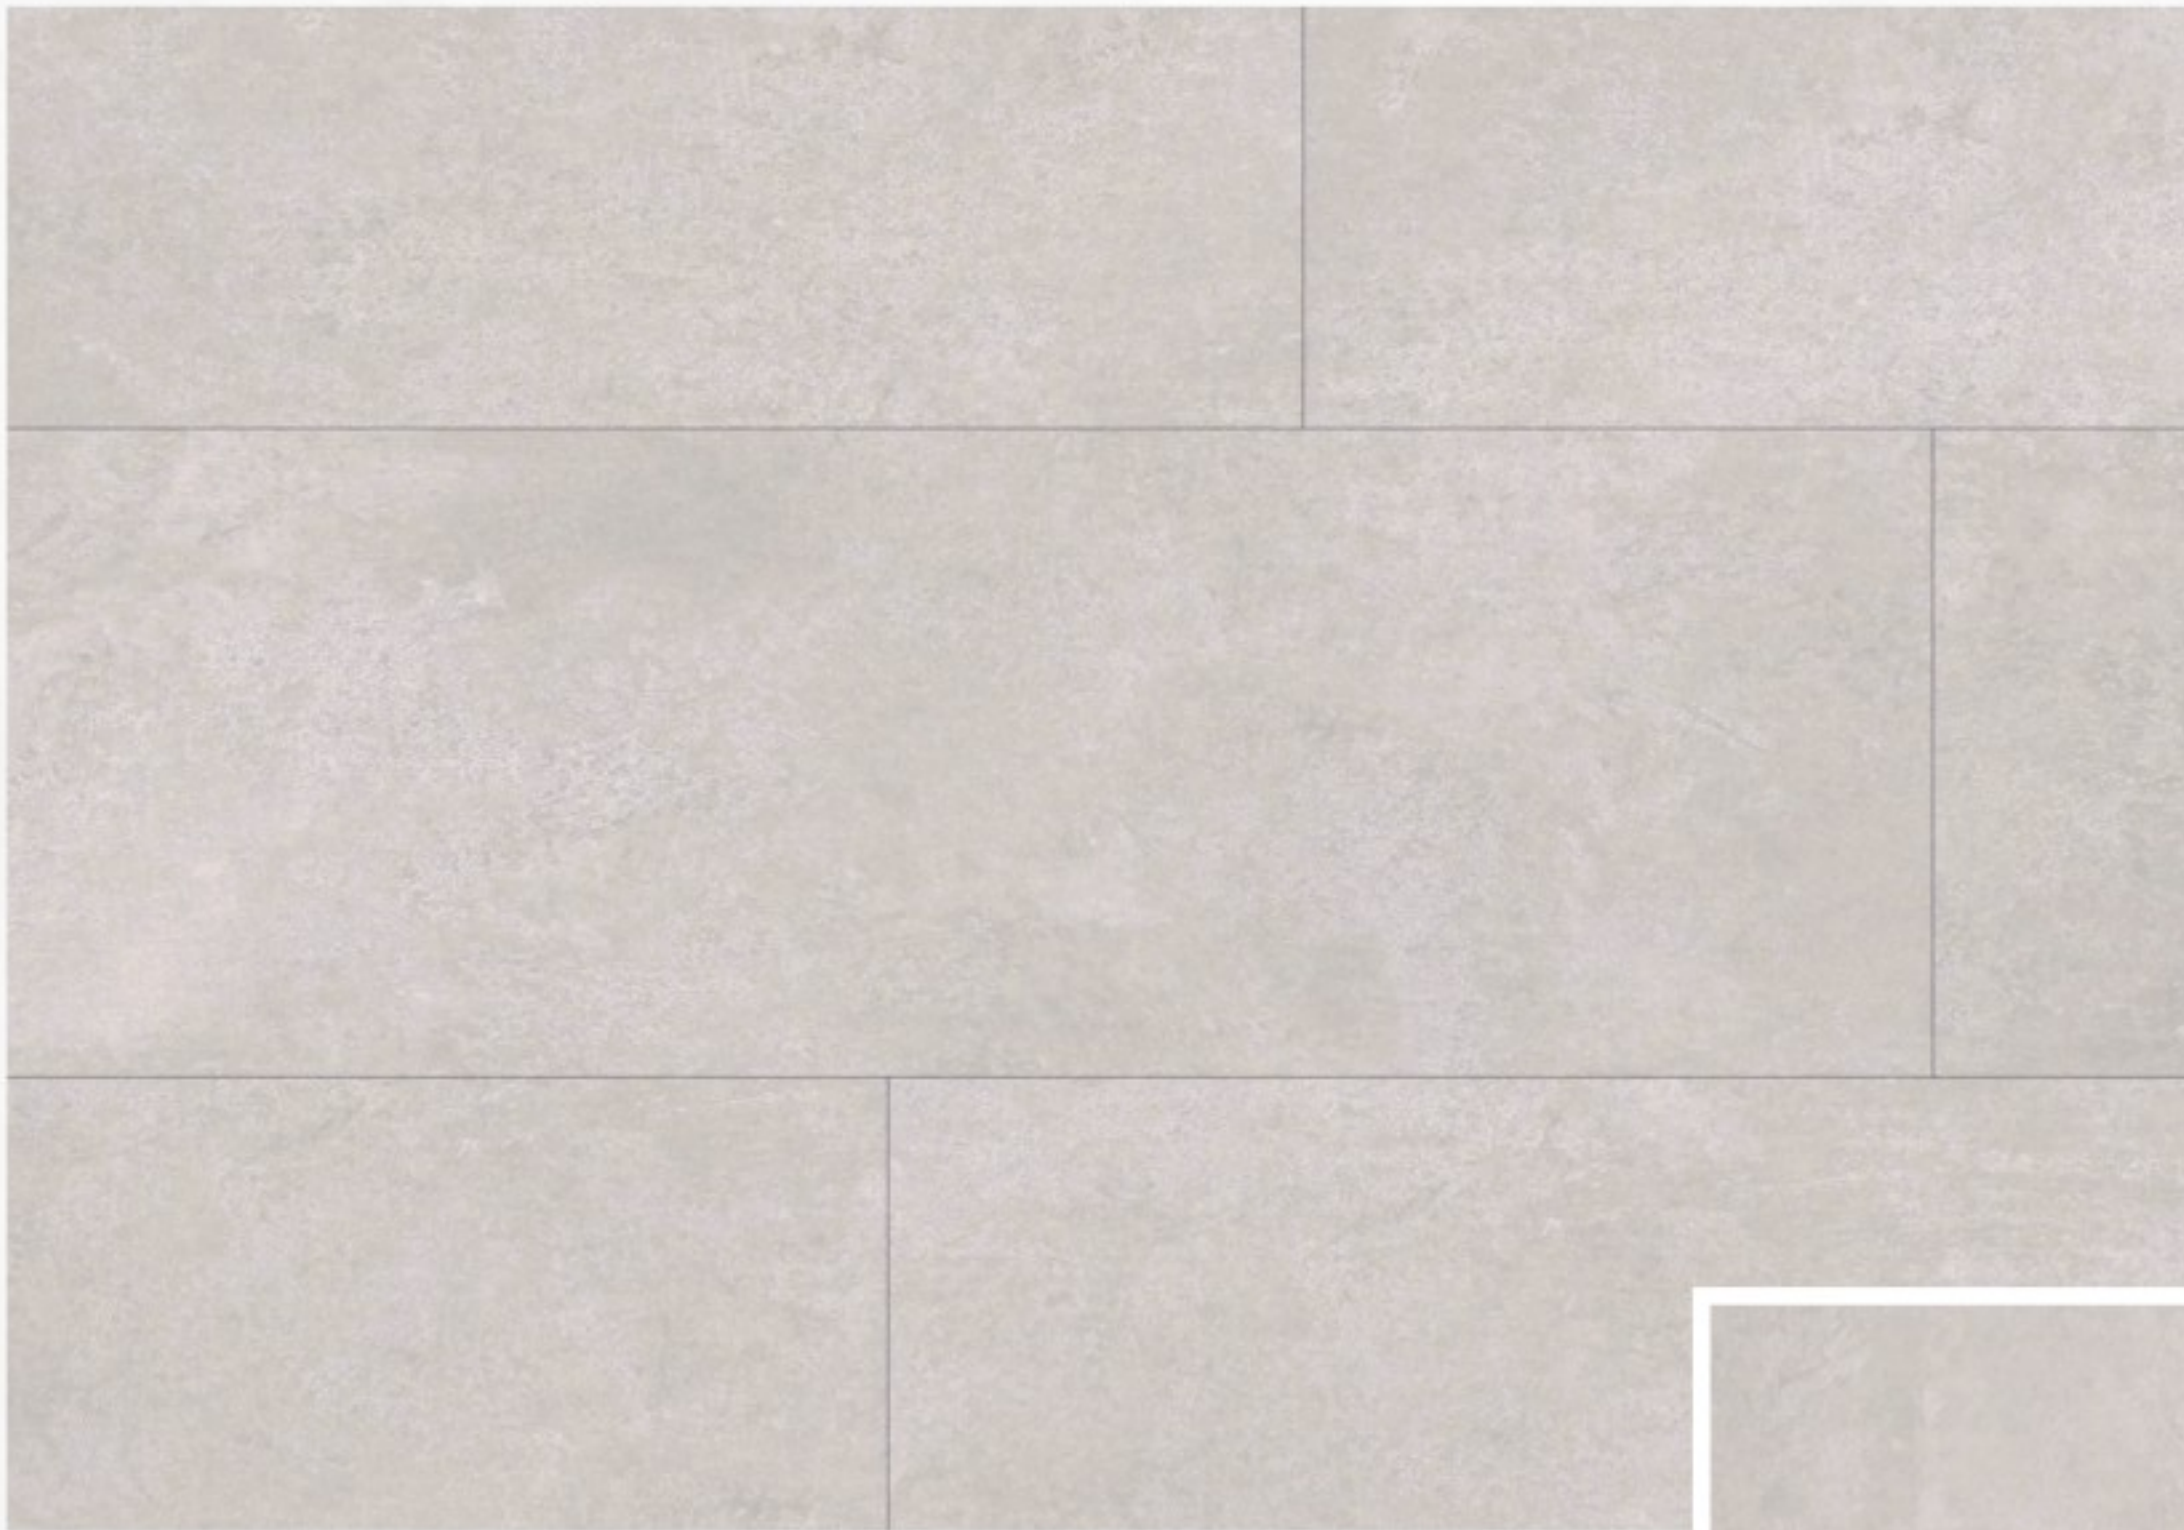

WS6224

Flooring Size: 470 x 940 x 8.0mm

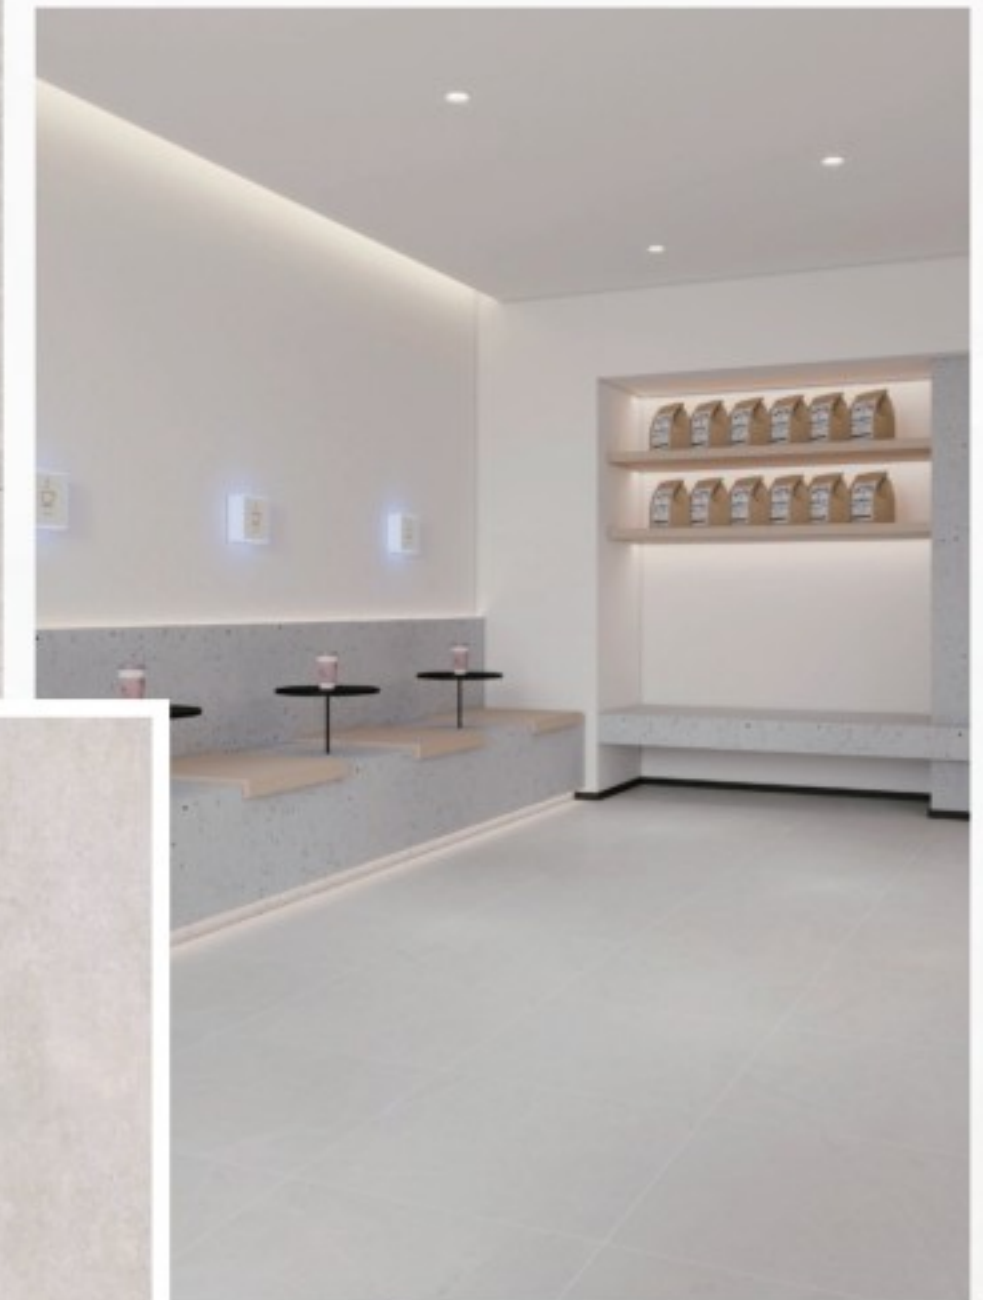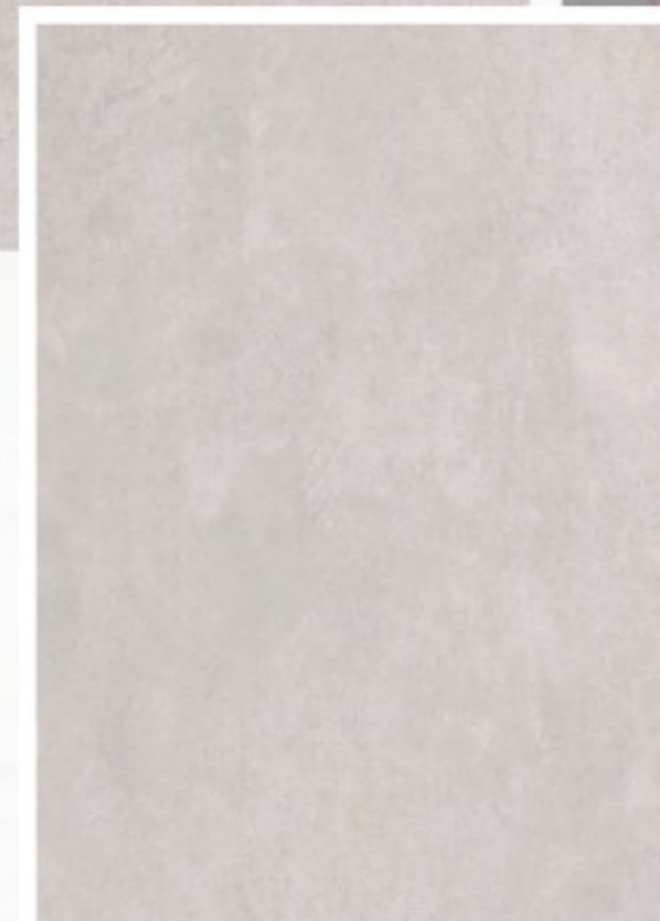



WS6225

Flooring Size: 470 x 940 x 8.0mm



2



W4210



W4214



NGW61140-38



NGW61140-19



NGW61140-51



NGW61140-44

SIX KINDS OF

WOOD GRAIN


CLASSIC COLOR






W4210
Flooring Size: 226 x 1500 x 8.0mm



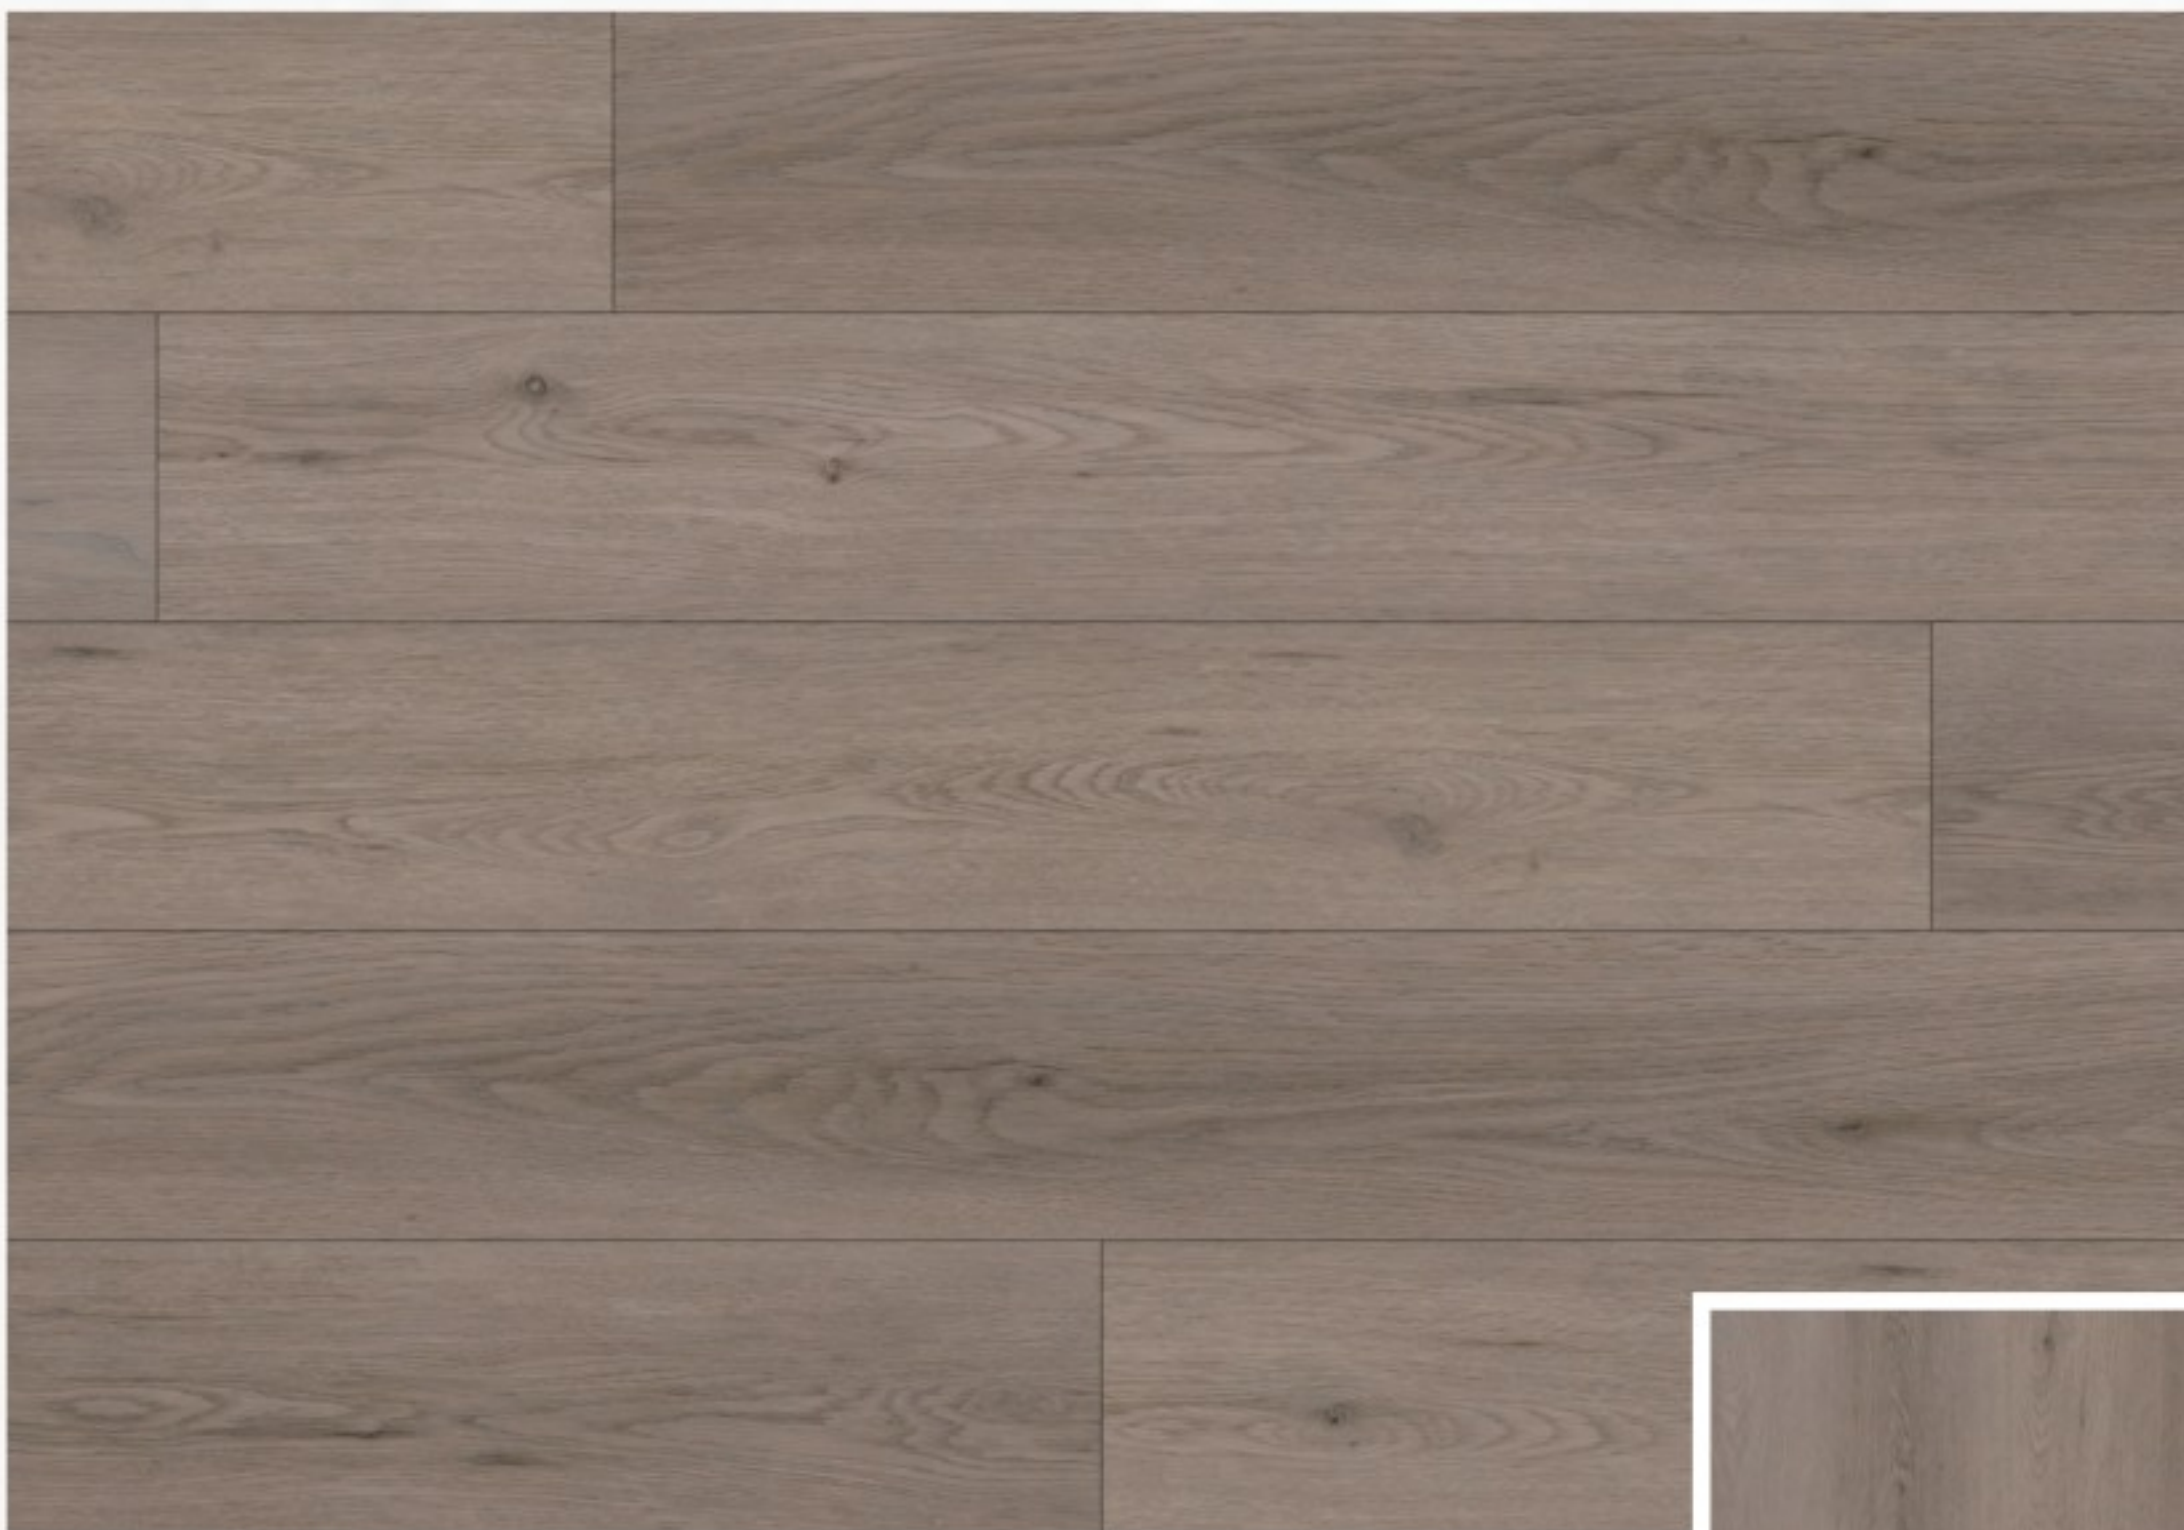


W4214
Flooring Size: 226 x 1500 x 8.0mm



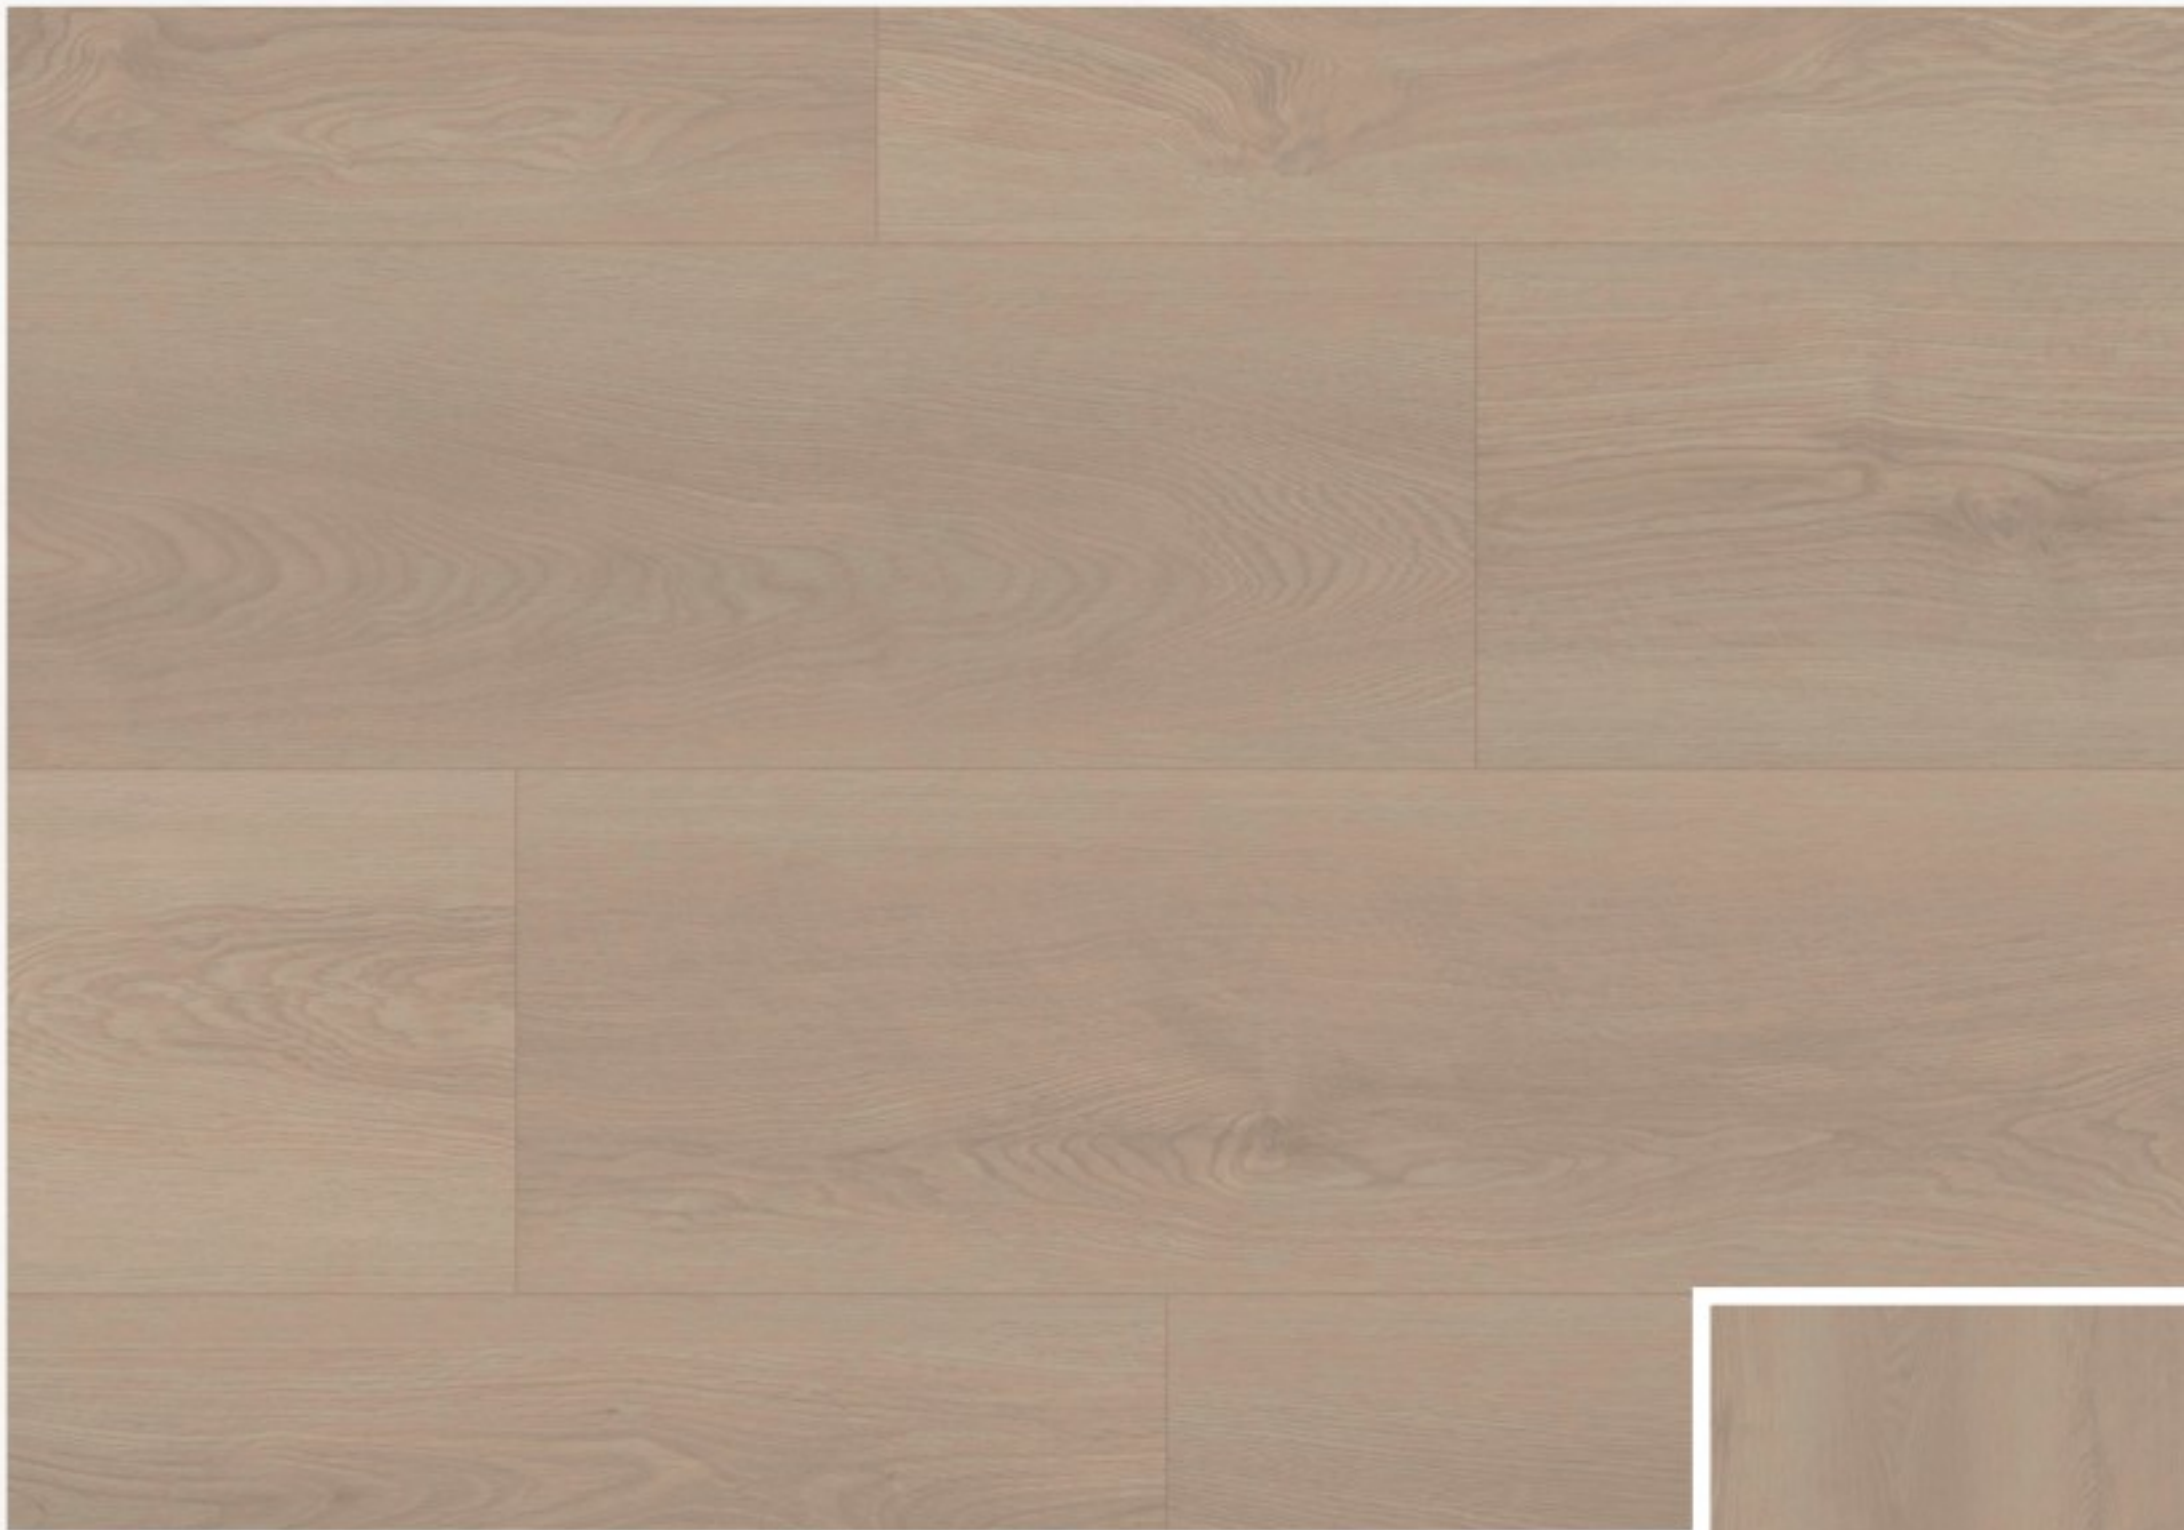


NGW61140-38
Flooring Size: 226 x 1500 x 8.0mm



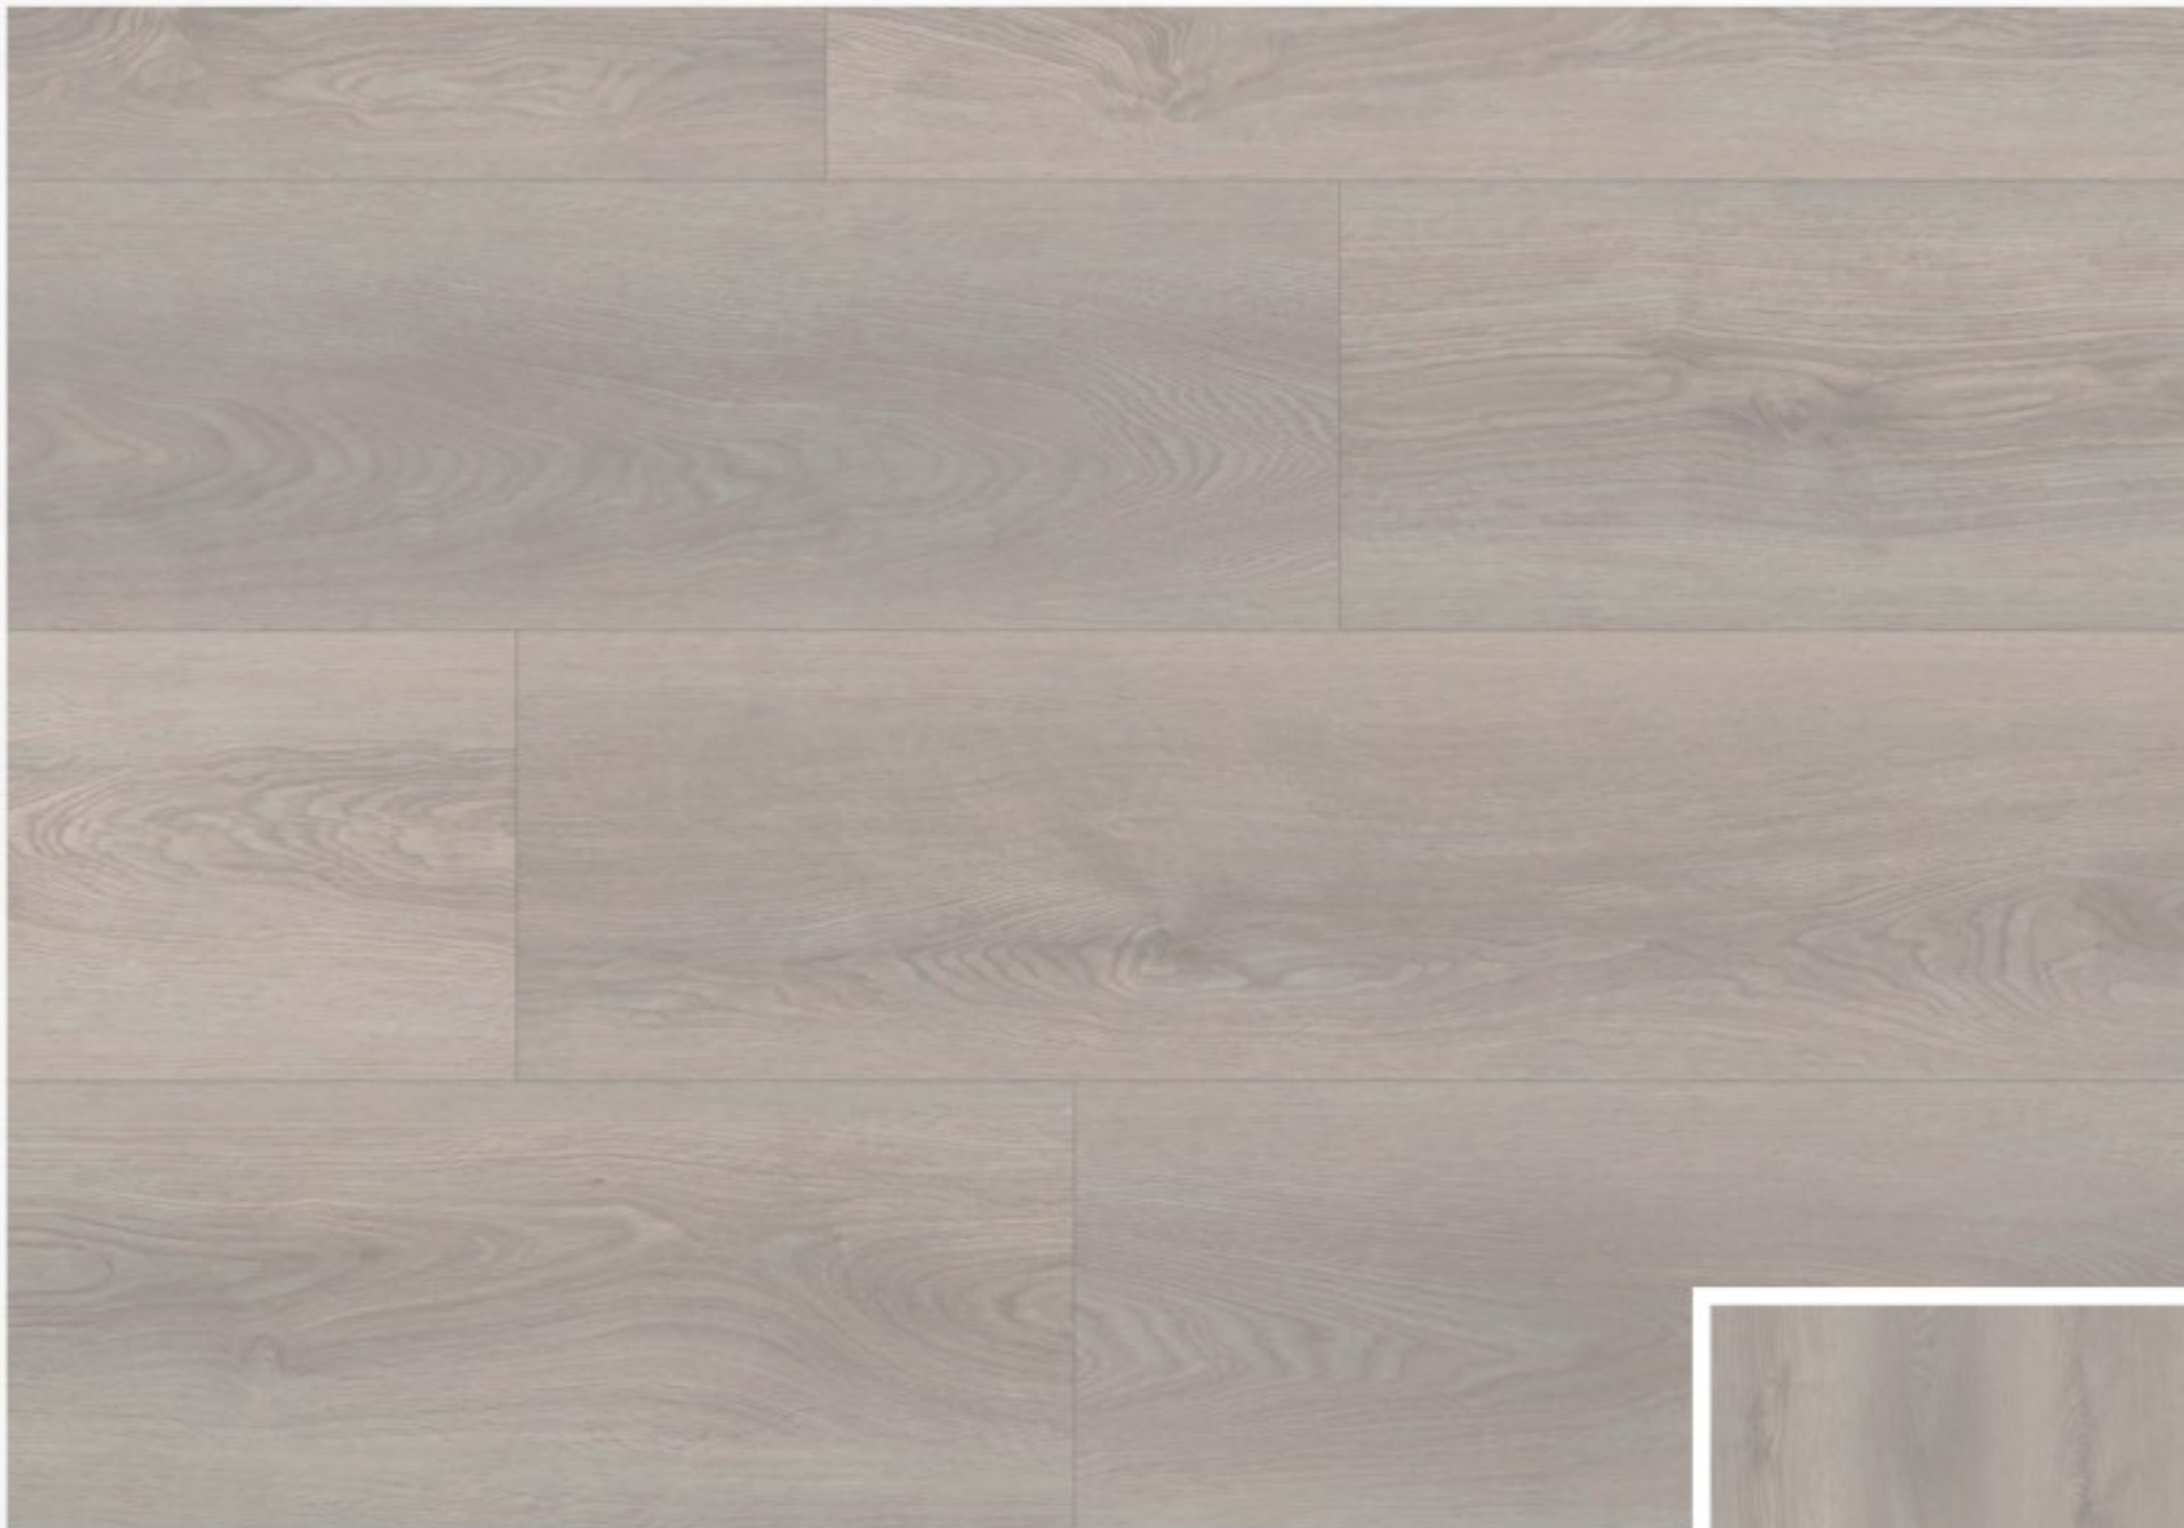

NGW61140-19
Flooring Size: 226 x 1500 x 8.0mm



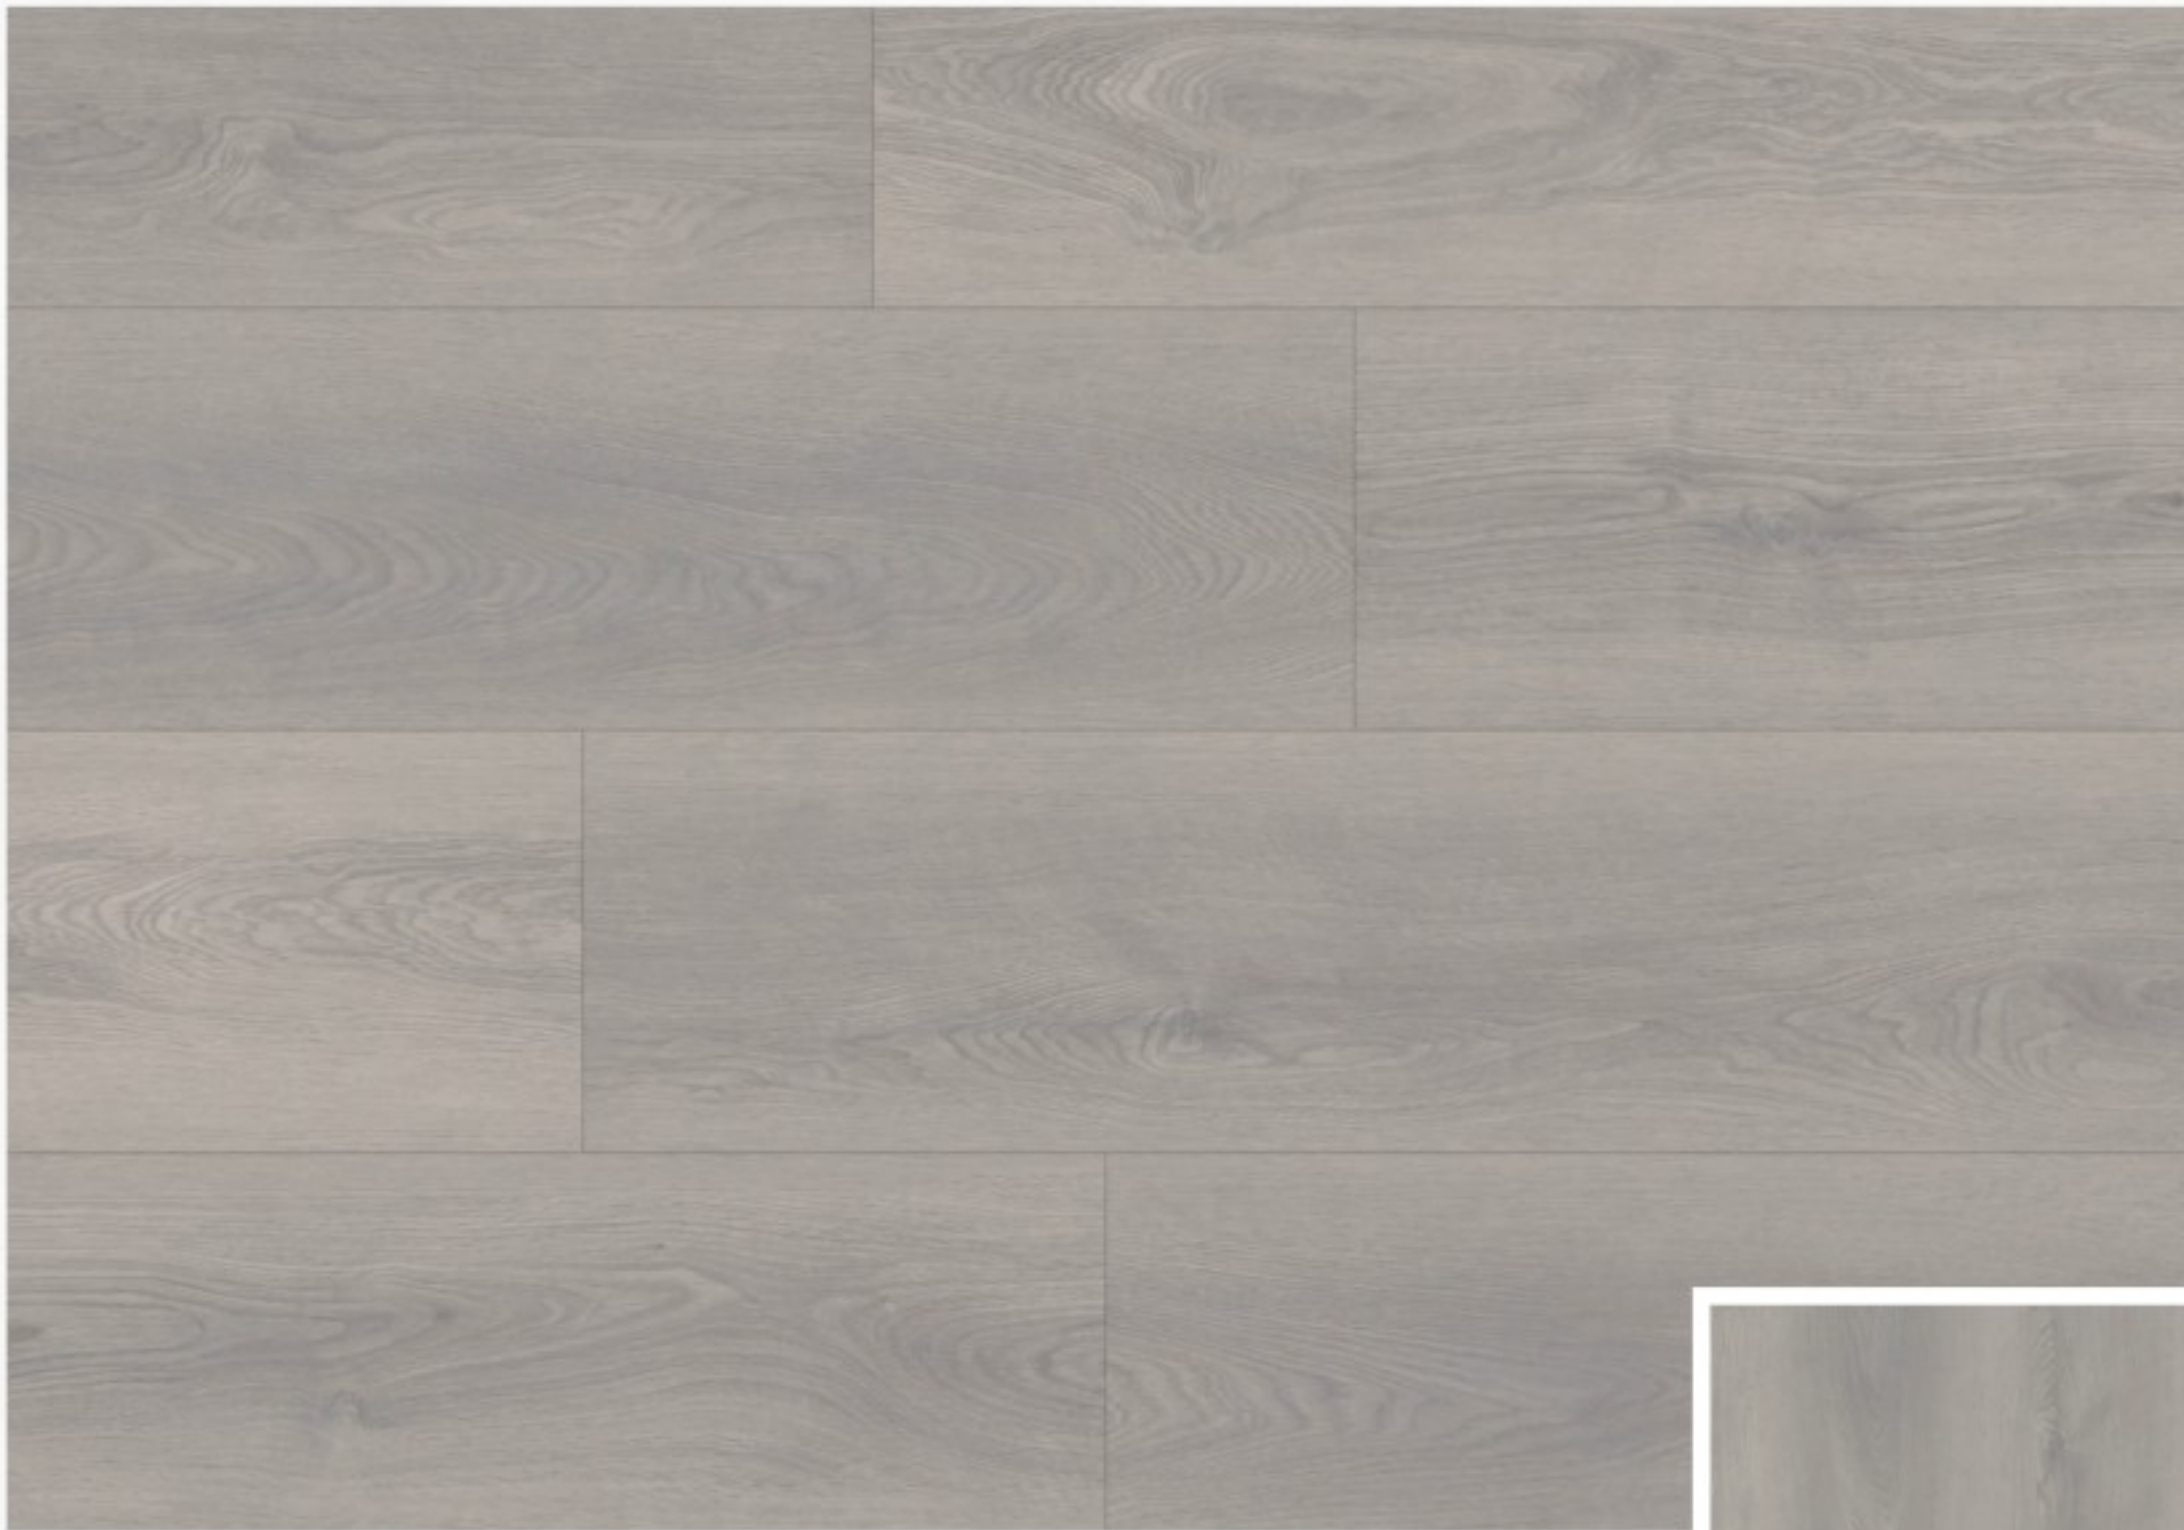


NGW61140-51

Flooring Size: 226 x 1500 x 8.0mm





NGW61140-44
Flooring Size: 226 x 1500 x 8.0mm

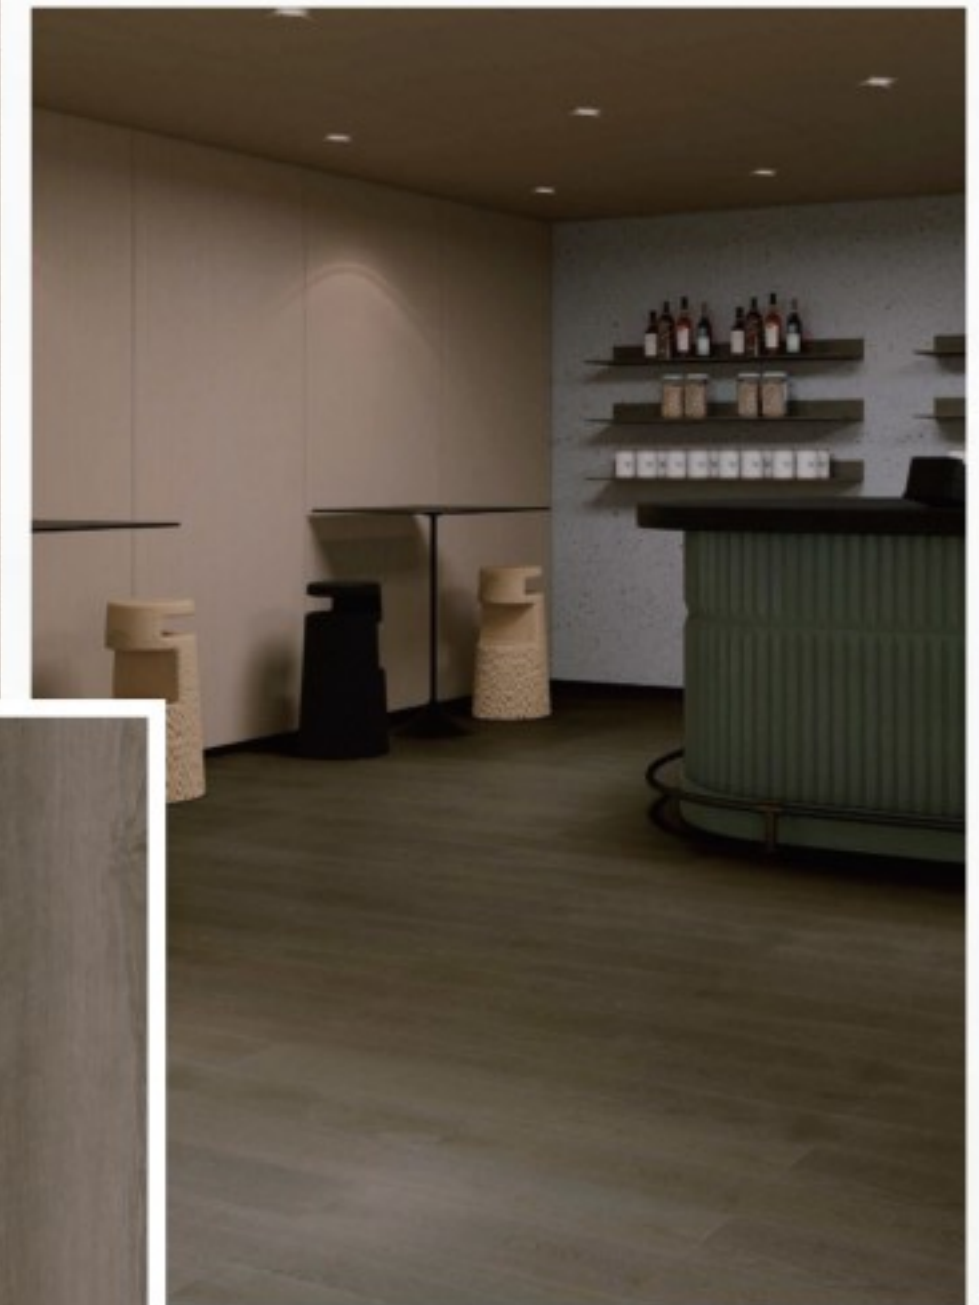

About Nature Green

At Nature Green, we consciously choose sustainable, dependable, and secure design wall panels—benefiting both you and the environment. Our fusion of natural aesthetics with top-tier materials empowers you to craft an appealing and functional interior. Enjoy the convenience of SPC flooring with a visual allure that seamlessly mimics authentic natural stone or wood.

Certifications

Nature Green are thoughtfully designed. All aspects are backed up by thorough testing and certification.

